Inst. Room Copy Do not R-13
Issue. Contains important
littles.

Rutherford ELECTRONICS CO.

LATEST REV

INSTRUCTION MANUAL

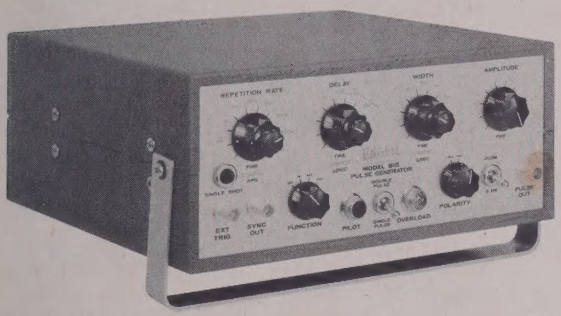

MODEL B15

Ser # 455

MODEL B15R

#28

WARRANTY

The RUTHERFORD ELECTRONICS CO. warrants to the original purchaser for a period of one (1) year, EXCEPT electron tubes and semiconductors which are warranted for ninety (90) days, after date of delivery that this instrument is free of defects in material and workmanship under normal use and service. Our liability is limited to repair or replacement of this instrument or defective parts, providing failure is not due to misuse, negligence, or accident.

In order to receive service under this warranty, promptly advise the factory of all details pertinent to failure of the instrument. Defective parts or instruments should be returned to the factory, shipment prepaid, for examination by the manufacturer to determine whether it is defective. The parts or units will be replaced or repaired and returned to the purchaser via surface transportation, freight prepaid.

Instruments on which the warranty does not apply or has expired will be repaired and billed to the purchaser on a parts and labor basis.

This warranty applies to used instruments for a ninety (90) day period. Warranty also applies to repairs to the extent of the repair only, for a period of thirty (30) days.

This warranty supersedes previous warranties and is expressly in lieu of any other warranties, expressed or implied, and the RUTHERFORD ELECTRONICS CO. neither assumes or authorizes any other person to assume for it any liability in connection with the instrument which is the subject of this warranty.

TABLE OF CONTENTS

SPECIFICATIONS . . . . . page 2
OPERATING INSTRUCTIONS . . . . . page 4
TECHNICAL DESCRIPTION . . . . . page 6
MAINTENANCE. . . . . page 8
PARTS LIST . . . . . page 10
BLOCK & TIMING DIAGRAM . . . . . page 15
SCHEMATIC DIAGRAM. . . . . page 16

Rutherford

ELECTRONICS CO.

MODEL B15/B15R

SER. NO. 455 / ST-0615/2

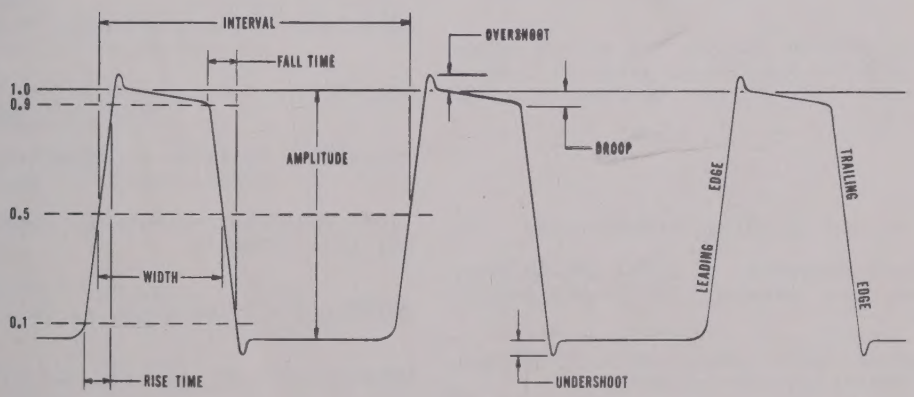

FIG. A: PULSE DEFINITIONS

IT IS UNDERSTOOD THAT ALL REFERENCES TO PULSE TERMINOLOGY IN THIS MANUAL ARE AS DEFINED ABOVE

SPECIFICATIONS

The following are the specifications of the model B15 and/or B15R.

MAIN PULSE

REPETITION RATE - 5 cycles/sec. to 5mc/sec.

By internal oscillator, continously variable in six overlapping decade ranges.

From an external source by the trigger specified below.

Single shot by built-in front panel push button.

PULSE DELAY - 0 to 10,000 µsec.

Continuously variable in five overlapping decade ranges as measured from the sync pulse specified below.

In the pulse pair mode, the first pulse is fixed at approximately zero delay and the second pulse is delayable with respect to the leading edge of the first. Spacing between the trailing edge of the first pulse and the leading edge of the second pulse may be set to any value from the pulse width being used to 10,000 µsec.

Maximum delay duty factor, is 70% of pulse to pulse spacing at repetition rates of 1 mc/-sec., or less. This figure decreases to 20% at 5 mc/sec.

PULSE WIDTH - 0.06 to 10,000 microseconds

Continuously variable in five overlapping decade ranges, as measured at the 50% amplitude points.

In the pulse pair mode, both pulses are controlled simultaneously in width.

Maximum width duty factor is 30% of pulse to pulse spacing at full output amplitude. Maximum pulse width duty factor, at reduced amplitude, is 70% at repetition rates of 2 mc/sec., or less. This figure decreases to 40% at 5 mc/sec.

Front panel indicator warns of reduced amplitude condition at duty factors in excess of 30%.

→ In the pulse pair mode, the duty factor limitations apply to the sum of both pulse widths.

AMPLITUDE - 0 to 10 volts, peak, into 50 Ω

Continuously variable by front panel control and 20 db fixed attenuator.

Full output amplitude is 16 volts into 1,000 Ω or more and 4 volts into 10 Ω.

Reduced amplitudes at width duty factors in excess of 30% are approximately 7.5 volts into 50 Ω at 2 mc/sec. and 70% duty factor and 9 volts into 50 Ω at 5 mc/sec. and 40% duty factor.

Slight reduction of output amplitude occurs at extremely low line voltage. Output amplitude is approximately 9.75 volts into 50 Ω with 105 volt line input.

Output is with respect to chassis ground. The output exhibits no measurable DC component.

In the pulse pair mode, the amplitude of both pulses is controlled simultaneously.

RISE TIME - 10 nanoseconds, or less.

FALL TIME - 10 nanoseconds, or less.

POLARITY - Positive or negative, but not simultaneously.

In the pulse pair mode, both pulses are of the same polarity.

OVERSHOOT - 5% maximum, at full amplitude.

UNDERSHOOT - 5%, maximum, at full amplitude.

DROOP - Negligible at widths of 1,000 µsec. or less. 10%, maximum, at 10,000 µsec.

SYNC PULSE

The following sync pulse is available as a T_o timing pulse.

DELAY - Approximately 120 nanoseconds with respect to an external trigger.

WIDTH - 75 nanoseconds, minimum.

AMPLITUDE - 5 volts, peak, minimum, open circuit.

RISE TIME - 25 nanoseconds, maximum.

POLARITY - Positive.

EXTERNAL TRIGGER

The unit may be triggered by a pulse which exhibits the following characteristics.

REPETITION RATE - 5 mc/sec., or less.

AMPLITUDE - 2 to 10 volts, peak.

RISE TIME - 1 usec, or less.

POLARITY - Positive.

NOTE: Several Model B15s may be triggered simultaneously from the sync pulse out of a master B15. Thus, the use of several B15s provides multiple output pulses which are synchronized in repetition rate and independent of each other in all other parameters.

MISCELLANEOUS SPECIFICATIONS

PHYSICAL DIMENSIONS

Cabinet Model, B15 - 12" wide, 5" high, 11 1/2 deep.

Rack Mounted, B15R - 19" wide, 5 1/4" high 11 1/2" deep.

WEIGHT

With battery pack - 14 lbs, net - 19 lbs, shipping.

Without battery pack - 10 lbs, net - 15 lbs, shipping.

Battery pack only - 4 lbs, net - 5 lbs, shipping.

POWER REQUIRED

105 to 125 volts, AC, 50 to 400 cps, 20 watts, maximum.

Wired for 220 volt operation on request, no additional charge.

BATTERY PACK - PART 9001001 (OPTIONAL)

Model B15 may be powered from a self-contained rechargeable battery pack. Battery charger is built into all units. Unit will operate for approximately eight (8) hours at 30% duty factor on a fully charged battery pack.

INPUT - OUTPUT CONNECTORS

Power in - Standard 3 wire power cord.
Signal connectors - type BNC.

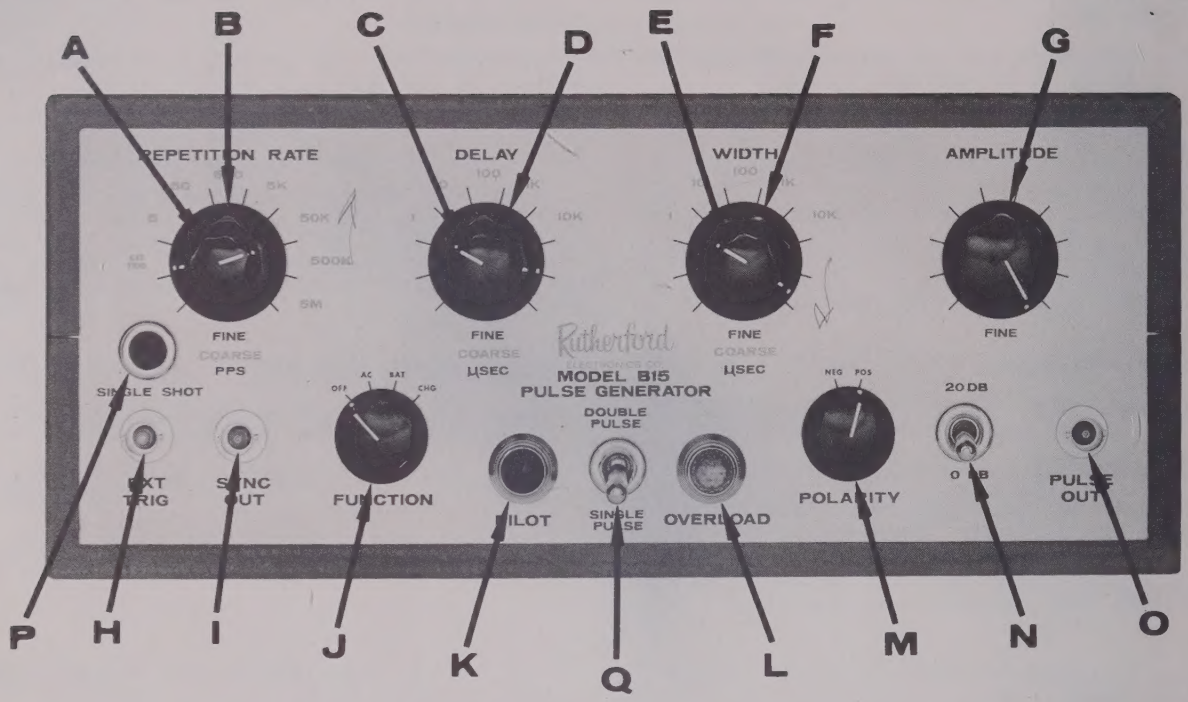

FIG. B: OPERATING CONTROLS

OPERATING INSTRUCTIONS

FRONT PANEL CONTROLS

Refer to Fig. B, above, for the location of the following front panel controls.

A REPETITION RATE RANGE SWITCH - Rotary switch, S1, selects "external trigger" operation or any range of internal oscillator operation.

B FINE REPETITION RATE CONTROL - Potentiometer, R4, is the vernier control of repetition rate through each of the internal oscillator ranges.

C DELAY RANGE SWITCH - Rotary switch, S3, selects any range of pulse delay.

D FINE DELAY CONTROL - Potentiometer, R16, is the vernier control of pulse delay through each delay range.

E WIDTH RANGE SWITCH - Rotary switch, S4, selects any range of pulse width.

F FINE WIDTH CONTROL - Potentiometer, R32, is the vernier control of pulse width through each width range.

G AMPLITUDE CONTROL - Potentiometer, R25, varies pulse amplitude from zero to full amplitude.

H EXT. TRIG. JACK - Coaxial connector, J1, couples a trigger pulse from an external source into the trigger amplifier, Q4, when operating in the "external trigger" mode.

I SYNC OUT - Coaxial connector, J2, couples out the unit synchronizing output pulse.

J FUNCTION SWITCH - Rotary switch, S2, selects the unit mode of power operation. It selects "off", "AC" when operating from standard 60 cycle line, "Bat" when operating from the internal battery pack, and "Chg" when re-charging the internal battery pack.

K PILOT LAMP - Lamp, DS1, indicates when the unit is on AC line operation only.

L OVERLOAD INDICATOR - Lamp, DS2, indicates when the unit is being operated in excess of 30% duty factor. It is a warning to the operator that the output pulse amplitude is being automatically reduced.

M POLARITY SWITCH - Rotary switch, S6, selects the polarity of the main output pulse.

N ATTENUATOR SWITCH - Toggle switch, S5, inserts a fixed 20db of attenuation. This should be used for improved pulse shape when operating at low output levels.

O PULSE OUT JACK - Coaxial connector, J3, couples out the main output pulse.

P SINGLE SHOT

Q PULSE MODE - Single or double pulse mode.

PRELIMINARY INSTRUCTIONS

The 30% duty factor limitation is automatically controlled in the model B15. Should the duty factor limitation be exceeded, the model B15 automatically reduces the amplitude of the output pulse to such a level that the ratings of the output transistor are not exceeded. When the duty cycle limiter is in operation, the duty cycle lamp is lit to warn the operator of the reduced pulse amplitude condition.

FIRST TIME OPERATION

The following procedure is recommended for putting the instrument into operation for the first time.

1. Turn the power (Function) switch to "OFF" and connect the line cord to a source of 115 volt, 50-60 cps power.

2. Set the instrument controls as follows:

   A. Repetition Rate Range — 50 kc
   B. Repitition Rate — 5 kc
   C. Delay Range — 1µsec
   D. Delay — 0µsec
   E. Width Range — 10µsec
   F. Width — 5µsec
   G. 20db Step Attenuator — 0db
   H. Amplitude — cw
   I. Polarity — "+"
   J. Pulse Mode — single pulse

3. Connect an oscilloscope as follows:

   A. Sweep — 1µsec/cm
   B. Vertical Deflection — 5volts/cm
   C. Trigger — External from the sync out connector on the model B15 front panel.

4. Connect a ground strap from the model B15 to a ground binding post on the oscilloscope.

5. Connect a resistive load between the pulse out connector and ground.

6. Connect the input probe of the oscilloscope across the external load. If the true waveform of the output pulse is to be observed, it is imperative that the oscilloscope input probe be properly compensated for viewing step function waveforms and that the probe ground strap be connected to the instrument chassis ground.

7. Turn the model B15 power switch to "AC" Adjust the trigger sensitivity of the oscilloscope for a stable trace. The model B15 controls may now be set to any desired values, taking into account duty factor considerations.

8. If the model B15 contains the optional battery pack, it may be switched to battery operation by turning the function switch to the "BAT" position.

TECHNICAL DESCRIPTION

The following dissertation describes the technical operation of the model B15 and/or B15R pulse generator. It includes a technical description and the theory of operation of each of the circuits. A careful study of the block and timing diagram (Dwg # 0010001) and the schematic diagram (Dwg # 0010004) in conjunction with this discussion will aid in a thorough understanding of the generator.

For purposes of simplicity, all components are referred to by their schematic symbol number. The schematic diagram and/or the instruction manual parts list should be consulted to determine the value, tolerance, etc. of specific components.

GENERAL DESCRIPTION

The model B15 consists of five sub-sections; the repetition rate section, the delay section, the width section, the output section, and the power supply.

The repetition rate section creates a basic system timing trigger. The repetition rate of the trigger is pre-determined by the setting of the front panel repetition rate range and vernier controls. This section also contains circuitry for triggering the generator from an external source and for supplying a T_o synchronizing pulse.

The delay section accepts the trigger from the repetition rate section, delays it in time by an amount pre-determined by the front panel delay range and vernier settings, and presents a trigger to the width section. This trigger ultimately forms the leading edge of the output pulse.

The width section creates a waveform which starts in time coincidence with the output trigger of the delay unit and ends after a time which is pre-determined by the setting of the front panel width range and vernier dial.

The output section receives this waveform from the width section, amplifies it, and presents it as the main output pulse. The polarity and amplitude of the main output pulse are also determined by circuitry in the output section.

The power supply section furnishes all of the voltages necessary for the proper operation of the generator.

THE REPETITION RATE SECTION

The repetition rate section consists of an emitter-coupled, free-running multivibrator (Q1 and Q3), a constant current source (Q2), a trigger amplifier (Q4), a sync pulse amplifier (Q5), and their associated circuitry.

For purposes of explanation, assume that the multivibrator is at the very beginning of a normal run-down period. Let us examine the conditions as they exist at this point in time.

1. There is a steady-state current flowing through R1, Q1, R4, and R3. This establishes a steady-state voltage at the base of Q3 which is a few volts negative with respect to the +7.5 volt supply. This also establishes a steady voltage at the base of Q2.

2. A small current is flowing through R6, Q3, and R7.

3. The selected timing capacitor (C2 through C7) is fully charged. The junction of CR1, CR2, and the timing capacitor is at a voltage which is positive with respect to the +7.5 volt supply.

Continuing on in time, the voltage at the junction of CR1, CR2, and the timing capacitor is decreasing linearly with respect to time due to the discharge of the timing capacitor by the constant current source Q2, and R5. At a certain point in time, the voltage at this junction reaches a level where CR1 starts to conduct. Let us stop at this point, just after the start of CR1 conduction, and again examine what is happening.

1. In starting to conduct, CR1 is drawing some of the current which had been flowing through Q1, R4, and R3. This decrease in current flow causes a drop in voltage at the base of Q3.

2. Current flow increases in Q3 which in turn increases the current flow through CR1, further cutting Q1 off. As Q1 is further cut off, the voltage at the base of Q3 drops further, etc.

This action, in a very short time, produces a surge of current through CR2, the timing capacitor, Q3, and R7. This surge recharges the capacitor to a point near its original charge, the final conduction of CR1 returns it to its full original charge, and the cycle begins again.

A positive-going pulse, created by the current surge during recharge time, is coupled from the collector of Q3, through C10, to the trigger amplifier, Q4. Note that in the external trigger mode of operation, the positive external trigger pulse is coupled directly into Q4 through C9. During this mode of operation, the timing capacitor is removed from the multivibrator by range switch S1, disabling the internal repetition rate section.

Decade ranges of repetition rate are established by the timing capacitors, C2 through C7 and C52, which are switched into the circuit by the range switch S1. Vernier control

of repetition rate through each range is accomplished by R4 which varies the constant current source used to discharge the timing capacitor. Potentiometer, R3, sets the low end calibration of all ranges by adjusting the steady-state voltage level at the base of Q2. High end calibration is accomlished by R5. By-pass and de-coupling components such as C1, C8-R63, and C16-R64 help to eliminate jitter and prevent interaction between the multivibrator and other circuitry within the unit.

The remaining circuit in the repetition rate section is the sync pulse amplifier, Q5. The negative-going timing pulse from the collector of Q4 is coupled into the base of Q5 through C12 and DL1. The positive-going sync pulse is coupled to the front panel jack, J2, through C14. Delay line, DL1, delays the synchronizing pulse by approximately 0.120 usec, with respect to the repetition rate section output trigger. This is approximately the time delay which is inherent in the remainder of the pulse handling circuitry. Thus, we are able to produce the output pulse with a minimum delay of 0.0 usec with respect to the sync pulse.

THE DELAY SECTION

Transistors Q6, Q7, Q8, and Q9 form the delay section of the model B15. In the normal, steady-state condition Q8 is conducting, its base being held approximately one volt less positive than the base of Q7 by the CR8, CR9, and R23 combination. Q6 and Q7 are cut off, and Q9 is conducting.

When the negative-going trigger pulse from Q4 appears at the base of Q6 its collector goes momentarily positive, cutting off Q9. The emitter of Q9 goes a few volts positive and the current through R27 and R54 flows through the selected timing capacitor (C17 through C22). This flips the base of Q8 positive, which cuts Q8 off. Q7 picks up the current through R19, which in turn raises the voltage at the base of Q9 to an amount determined by the settings of R16 and R17.

The current through R27 and R54 continues to charge the timing capacitor and hold Q8 cut-off until the voltage at the junction of R27 and the timing capacitor reaches a value corresponding to the voltage set on the base of Q9. When this occurs, Q9 begins to conduct again, the base voltage of Q8 drops, allowing it to conduct again. Q7 cuts off and the circuit has returned to its normal steady-state condition. It will remain in this condition until the advent of another trigger pulse from the repetition rate section.

The trailing edge of the waveform at the collector of Q8 is differentiated and coupled through pulse transformer T2 to trigger the width section.

Thus, we have created a trigger pulse which is delayed in time with respect to the initiating trigger.

Decade ranges of delay are established by the timing capacitors, C17 through C22, which are switched into the circuit by range switch S3. Vernier control of delay through each range is accomplished by R16 which establishes the point in time that Q9 starts to conduct by setting the voltage level at the base of Q9. Potentiometer, R17, sets the low end calibration of all ranges by fixing a minimum voltage to which the base of Q9 may be set. High end calibration is accomplished by R27. By-pass and de-coupling components such as C41-R65, C43-R66, and C47-R57 help to eliminate jitter and prevent interaction between the delay circuit and other circuitry within the unit. Diode CR10 provides protection for the emitter-base junction of Q9.

THE PULSE WIDTH SECTION

With the exception of the type of waveform coupled out, the width section operates in exactly the same manner as the delay section.

Transistors Q11, Q12, Q13, and Q14 form the pulse width section of the model B15. In the normal, steady-state condition Q13 is conducting, its base being held approximately one volt less positive than the base of Q12 by the CR13, CR14, and R38 combination. Q11 and Q12 are cut off, and Q14 is conducting.

When the negative-going trigger pulse from T2 appears at the base of Q11 its collector goes momentarily positive, cutting off Q14. The emitter of Q14 goes a few volts positive and the current through R39 and R55 flows through the selected timing capacitor (C28 through C33). This flips the base of Q13 positive, which cuts Q13 off. Q12 picks up the current through R34, which in turn raises the voltage at the base of Q14 to an amount determined by the settings of R32 and R33.

The current through R39 and R55 continues to charge the timing capacitor and hold Q13 cut off until the voltage at the junction of R39 and the timing capacitor reaches a value corresponding to the voltage set on the base of Q14. When this occurs, Q14 begins to conduct again, the base voltage of Q13 drops, allowing it to conduct again, Q12 cuts off and the circuit has returned to its normal steady-state condition. It will remain in this condition until the advent of another trigger pulse from the delay section.

The waveform at the collector of Q13, which is a negative-going pulse starting in time coincidence with the trigger from the delay unit and equal in duration to the desired pulse width, is coupled through R37 and C26 to the pulse forming section.

Decade ranges of width are established by the timing capacitors, C28 through C33, which are switched into the circuit by range switch S4. Vernier control of width through each range is accomplished by R32 which establishes the point in time that Q14 starts to conduct

by setting the voltage level of the base of Q14. Potentiometer, R33, sets the low end calibration of all ranges by fixing a minimum voltage to which the base of Q14 may be set. High end calibration is accomplished by R39. By-pass and de-coupling components such as C44-R67, C46-R68, and C48-R58 help to eliminate jitter and prevent interaction between the delay circuit and other circuitry within the unit. Diode CR15 provides protection for the emitter-base junction of Q14.

THE OUTPUT SECTION

The output circuit consists of Q15, Q16, Q17, Q18, and their associated circuitry. Q15, Q16, and Q17 are three stages of RC coupled amplifiers.

Q15 is normally conducting. The negative-going pulse width waveform drives it out of conduction, The positive pulse output of Q15 is shaped and amplified by Q16. The output of Q16 is coupled through a shaping network, R43-C35, to Q17. The positive output from Q17 is further shaped by R49, R60, and C36 and is coupled to Q18. For a positive output pulse, R50 is switched into the base drive circuit of Q18.

Depending on the position of polarity switch S6, the output transistor, Q18, is connected as an emitter-follower (positive output pulse) or as a normal inverting amplifier (negative output pulse).

The power supply for transistors Q16, Q17, and Q18 is variable from zero to approximately +20 volts. This is controlled by the output amplitude control, R25. The T-section attenuator pad (S5, R45, R46, and R47) is a 20db attenuator which provides improved pulse shape at very low output levels.

C35, C36, and C51 are pulse shape controls. Diodes CR16, CR17, CR18, CR20, and CR21 and resistor R53 are protective devices which serve the purpose of protecting the output section transistors from injury due to spikes kicked back from externally connected lines, etc. L1 is a peaking choke which sharpens the leading edge of the output pulse.

THE POWER SUPPLY SECTION

The power supply section supplies two zener (CR7) regulated voltages, +7.5 and +15 volts (referenced to internal ground) and a variable zero to +20 volt supply. These voltages are derived from a bridge rectifier (CR3, CR4, CR5, and CR6) on the secondary of the input power transformer, T1.

Potentiometer R25 adjusts the base drive to Q10 to control the variable voltage. Emitter-follower Q10 controls voltage over a wide range, giving pulse amplitude control from zero to full amplitude. Diode CR19 provides a bias for holding Q17 off.

The overload lamp, DS2, is an indication to the operator that the unit is operating in excess of 30% duty factor and that the output pulse amplitude is being reduced.

When the polarity switch is in the positive position, the internal ground of the generator is connected to chassis ground. In the negative position, the variable +20 volts is connected to chassis ground. Never physically connect the internal ground to chassis ground, as damage to the power supply will result.

MAINTENANCE

The following suggestions are designed to aid the maintenance technician in scheduling regular preventative as well as corrective maintenance routines. It is important that maintenance routines be performed regularly in order to obtain maximum life and usefullness from the instrument.

Although the transistorized model B15 should give years of trouble-free operation, it is important that normal inspection and cleaning routines be observed.

At regular intervals, any dust which may have settled on the interior of the instrument should be removed by means of dry compressed air. Avoid the use of high velocity air streams which might injure delicate components or disturb adjustments. Persistent dirt may be removed with a lint-free cloth and, if necessary, carbon tetrachloride.

While cleaning the interior of the instrument, inspect the rotary switches for proper centering of the contacts in each index position. Improperly centered contacts may result if the switch has become warped or twisted. Avoid excessive pressure on these contacts, as they are easily damaged. If the silver plated contacts of the rotary switches have become tarnished due to non-use, they may be cleaned by rotating the switch through all of its positions several times.

CALIBRATION

The model B15 contains nine (9) calibration controls and three (3) pulse shape adjustments, all of which are easily found when the covers are removed.

REPETITION RATE

To calibrate repetition rate, set the rep rate range switch, S1, to the 50kc range. Set the fine rep rate control, R4, to the low end (ccw) vernier mark. Adjust R3 (LO REP RATE ADJ on the bottom of the circuit board) for a 5kc rep rate. Reset R4 to the high end (cw) vernier mark and adjust R5 (HI REP RATE ADJ on the bottom fo the circuit board) for a 50kc rep rate. Repeat this process several times as there is a certain amount of inter-action between the two controls. Switch S1 to the 5mc range. Set R4 to the high end (cw) vernier mark. Adjust C2 (on the rep rate range switch) until the output pulse is operating at exactly 5mc (0.2µsec, pulse to pulse).

DELAY

To calibrate delay, set the delay range switch, S3, to the 10µsec range. Set the fine delay control, R16, to the high end (cw) vernier mark and adjust R27 (HI DEL ADJ on the bottom of the circuit board) for 10µsec delay, referrenced to the sync pulse output. NOTE: The low delay adjustment, R17, is a very critical adjustment which is pre-set and sealed at the factory. It is strongly recommended that this adjustment not be readjusted in the field. Switch S3 to the 1µsec range. Set R16 to the high end (cw) vernier mark. Adjust C17 (on the delay range switch) until the leading edge of the output pulse is delayed by exactly 1µsec from the leading edge of the sync pulse output.

WIDTH

To calibrate pulse width, set the width range switch, S4, to the 10µsec range. Set the fine width control, R32, to the high end (cw) vernier mark and adjust R39 (HI WID ADJ on the bottom of the circuit board) for 10 usecs pulse width, measured at 50% amplitude points. NOTE: The low width adjustment, R33, is a very critical adjustment which is pre-set and sealed at the factory. It is strongly recommended that this adjustment not be readjusted in the field. Switch S4 to the 1µsec range. Set R32 to the high end (cw) vernier mark. Adjust C28 (on the width range switch) until the pulse width is exactly 1µsec.

PULSE SHAPE

C35 and C36 (on the top of the circuit board) and C51 (between S5 and S6) are pulse shape adjustments. It is recommended that a sampling oscilloscope be used in adjusting pulse shape, as the vertical amplifiers of a slower type oscilloscope degrade the pulse rise time to the extent that it is nearly impossible to make proper adjustments.

Open C51 to its minimum capacity. Set pulse width to minimum, polarity to "+", and amplitude to full output (cw). Adjust C35 for minimum output pulse width, being careful not to introduce undershoot. Switch to negative output. Adjust C36 for optimum pulse shape, being careful not to introduce undershoot. Repeat the adjustment of C35 and C36 several times as there is a certain amount of inter-action between the two controls. Finally, adjust C51 for fastest risetime, being careful not to introduce overshoot.

Introduce approximately 20db of attenuation with the amplitude control and recheck all parameters making slight readjustments if necessary.

TROUBLE SHOOTING

The following trouble shooting suggestions are offered as being the most logical, step-by-step method of quickly ascertaining the reason for failure. This method assumes that there are no outputs from the generator in any mode of operation.

Step #1 — Check the input line voltage to ascertain that it is being delivered properly to the B15 input connector. If good, proceed to step #2.

Step #2 — Check all operating controls for proper setting. Specifically check that the delay or pulse width settings fo not exceed approximately 80% of the pulse to pulse spacing, that the amplitude control is in the clockwise position, that the attenuator toggle switch is in the 0db position, and that the function switch is in the AC position. If good, proceed to step #3.

Step #3 — Check the line fuse on the rear of the instrument. If blown, proceed to step #4. If good, replace and proceed to step #5.

Step #4 — Check for shorted T1, CR3 through CR6, or a voltage supply line shorted to internal or chassis ground.

Step #5 With the polarity switch in the "+" position, check the +15V., +7.5V., and variable 0 to +20 volt supply lines. In the "+" polarity position these may be checked against chassis ground. The 0 to +20 volt variable supply may be varied with the amplitude control. If voltages are in error, proceed to step #6. If they are good, proceed to step #7.

Step #6 If the +15 and +7.5V. supplies are bad, check the circuitry of zener diode CR7. If the variable supply is bad check the circuitry of emitter-follower, Q10.

Step #7 Check for a sync pulse out at J2. If it is not there, proceed to step #8. If it is present, proceed to step #9.

Step #8 Check for a negative-going pulse at the base of Q5. If it is there, replace Q5. If it is not there check for a positive pulse at the base of Q4. If it is there, replace Q4. If it is not there check the circuitry associated with the rep rate multivibrator; Q1, Q2, and Q3. Refer to the technical section of this manual for a complete description of the proper operation of this circuit.

Step #9 Sync the oscilloscope with the sync pulse and check for a positive-going pulse at the base of Q18. If it is present, check Q18 and the circuitry associated with S5 and S6. If it is not there, proceed to step #10.

Step #10 Check for a negative-going pulse at the base of Q17. If it is there, replace Q17. If it is not there, proceed to step #11.

Step #11 Check for a positive-going pulse at the base of Q16. If it is there, replace Q16. If not, proceed to step #12.

Step #12 Check for a negative-going pulse at the base of Q15. If it is there, replace Q15. If not, proceed to step #13.

Step #13 Check for a negative-going spike at the base of Q11. If it is present, check the circuitry of the width multivibrator; Q11, Q12, Q13 and Q14. Refer to the technical section of this manual for a complete description of the proper operation of this circuit. If there is no pulse at the base of Q11, proceed to step #14.

Step #14 Check for a negative-going spike at the base of Q6. If it is there, and it should be since there is a sync pulse, check the circuitry of the delay multivibrator; Q6, Q7, Q8, and Q9. Refer to the technical section of this manual for a complete description of the proper operation of this circuit.

PARTS LIST

This parts list contains identifying information on all of the replaceable parts contained in the model B15 and/or B15R. These parts are listed in alpha-numerical order by schematic symbol number. All items with or without circuit reference numbers are considered replaceable parts.

The column headed "RUTHERFORD ELECTRONICS CO. STOCK #" is the component identifying number assigned by the RUTHERFORD ELECTRONICS CO.

The column headed "CIRCUIT REFERENCE #" designates the component as it is found on the schematic diagram, Dwg. # 0010004.

The column headed "DESCRIPTION" is, in general, a full electrical description of the component.

The column headed "SUGGESTED UNIT PRICE" gives only an indication of the probable cost for a single unit of the component or assembly listed, if purchased from the RUTHERFORD ELECTRONICS CO. It is not, in any case, to be construed as a firm price quotation. Any customer wishing to purchase a complete or partial set of spare parts should enter a request for quotation of price and delivery to the RUTHERFORD ELECTRONICS CO. or their authorized representatives.

The column headed "SUGGESTED SPARES" lists the quantity of each of the items which the manufacturer recommends as spares for one (1) years operation.

When ordering a complete or partial set of spares, specify by listing all of the information contained in this list for that particular part. The more descriptive information given on a parts order, the less chance there is for expensive and time consuming error.

Minimum parts order billing is $7.50. Prices are subject to change without notice.

ABBREVIATIONS

cer	ceramic	k	kilohm or 10^3 ohms	prec	precision
comp	composition	m	milli or 10^{-3}	PT	paper tubular
EMC	electrolytic, metal cased	meg	megohm or 10^6 ohms	SM	silvered mica
EMT	electrolytic, metal tubular	MF	metal film	V	working volts, DC
f	farad	µ	micro or 10^{-6}	var	variable
GMV	guaranteed minimum value	µµ	micromicro or 10^{-12}	W	watt
h	henry	Ω	ohm	WW	wire wound
DM	dipped mica				

REFERENCE DESIGNATION INDEX

CIRCUIT REFERENCE	R.E.C. STOCK NUMBER	DESCRIPTION	SUGGESTED UNIT PRICE	SUG. SPARES
B1	9001001	BATTERY PACK	$ 75.00	
C1	1518022	CAPACITOR, fixed, cer, 0.01uf, 500V, GMV	.15	5
C2	1574005	CAPACITOR, var, mica, 9-180uµf, 175V	.50	5
C3	1528064	CAPACITOR, fixed, DM, 100uµf, 500V, ±5%	.17	1
C4	1528069	CAPACITOR, fixed, DM, 4700uµf, 500V, ±1%	1.12	3
C5	1534004	CAPACITOR, fixed, mylar, 0.047uf, 200V, ±1%	2.28	3
C6	1534011	CAPACITOR, fixed, mylar, 0.47uf, 200V, ±1%	2.25	3
C7	1534016	CAPACITOR, fixed, mylar, 4.7uf, 200V, ±1%	9.00	3
C8	1518027	CAPACITOR, fixed, cer, 0.1uf, 100V, -20+80%	.35	14
C9	1518022	CAPACITOR, fixed, cer, 0.01uf, 500V, GMV	.15	
C10	1528065	CAPACITOR, fixed, DM, 150uµf, 500V, ±5%	.17	1
C11	1528063	CAPACITOR, fixed, DM, 75uµf, 500V, ±5%	.16	1
C12	1528012	CAPACITOR, fixed, SM, 47uµf, 500V, ±5%	.40	1
C13	1528066	CAPACITOR, fixed, DM, 180uµf, 500V, ±5%	.20	2
C14	1518022	CAPACITOR, fixed, cer, 0.01uf, 500V, GMV	.15	
C15	1520043	CAPACITOR, fixed, EMC, 1500uf, 50V, -20+50%	4.00	2
C16	1518027	CAPACITOR, fixed, cer, 0.1uf, 100V, -20+80%	.35	
C17	1574005	CAPACITOR, var, mica, 9-180uµf, 175V	.50	
C18	1528067	CAPACITOR, fixed, DM, 330uµf, 500V, ±5%	.21	3
C19	1528069	CAPACITOR, fixed, DM, 4700uuf, 500V, ±1%	1.12	
C20	1534004	CAPACITOR, fixed, mylar, 0,047uf, 200V, ±1%	2.28	
C21	1534011	CAPACITOR, fixed, mylar, 0.47uf, 200V, ±1%	2.25	
C22	1534016	CAPACITOR, fixed, mylar, 4.7uf, 200V, ±1%	9.00	

REFERENCE DESIGNATION INDEX

CIRCUIT REFERENCE	R.E.C. STOCK NUMBER	DESCRIPTION	SUGGESTED UNIT PRICE	SUG. SPARES
C23	1520038	CAPACITOR, fixed, EMT, 500uf, 25V, -10+50%	2.30	2
C24	1528066	CAPACITOR, fixed, DM, 180uµf, 500V, ±5%	.20	
C25	1520043	CAPACITOR, fixed, EMC, 1500uf, 50V, -10+50%	4.00	
C26	1528067	CAPACITOR, fixed, DM, 330uµf, 500V, ±5%	.21	
C27	1518027	CAPACITOR, fixed, cer, 0.1uf, 100V, -20+80%	.35	
C28	1574005	CAPACITOR, var, mica, 9-180uµf, 175V	.50	
C29	1528067	CAPACITOR, fixed, DM, 330uµf, 500V, ±5%	.21	
C30	1528069	CAPACITOR, fixed, DM, 4700uµf, 500V, ±1%	1.12	
C31	1534004	CAPACITOR, fixed, mylar, 0.047µf, 200V, ±1%	2.28	
C32	1534011	CAPACITOR, fixed, mylar, 0.47µf, 200V, ±1%	2.25	
C33	1534016	CAPACITOR, fixed, mylar, 4.7uf, 200V, ±1%	9.00	
C34	1518022	CAPACITOR, fixed, cer, 0.01µf, 500V, GMV	.15	
C35	1574005	CAPACITOR, var, mica, 9-180uµf, 175V	.50	
C36	1574005	CAPACITOR, var, mica, 9-180uµf, 175V	.50	
C37	1520038	CAPACITOR, fixed, EMT, 500µf, 25V, -10+50%	2.30	
C38	1518027	CAPACITOR, fixed, cer, 0.1µf, 100V, -20+80%	.35	
C39	1518027	CAPACITOR, fixed, cer, 0.1µf, 100V, -20+80%	.35	
C40	1518027	CAPACITOR, fixed, cer, 0.1µf, 100V, -20+80%	.35	
C41	1518027	CAPACITOR, fixed, cer, 0.1µf, 100V, -20+80%	.35	
C42	1518027	CAPACITOR, fixed, cer, 0.1µf, 100V, -20+80%	.35	
C43	1518027	CAPACITOR, fixed, cer, 0.1µf, 100V, -20+80%	.35	
C44	1518027	CAPACITOR, fixed, cer, 0.1µf, 100V, -20+80%	.35	
C45	1520046	CAPACITOR, fixed, EMT, 2000uf, 25V, -10+50%	3.20	1
C46	1518027	CAPACITOR, fixed, cer, 0.1uf, 100V, -20+80%	.35	
C47	1518033	CAPACITOR, fixed, cer, 1000uuf, 500V, ±10%	.35	
C48	1518033	CAPACITOR, fixed, cer, 1000µµf, 500V, ±10%	.35	
C49		NOT ASSIGNED		
C50	1518027	CAPACITOR, fixed, cer, 0.1uf, 100V, -20+80%	.35	
C51	1574005	CAPACITOR, var, mica, 9-180uµf, 175V,	.50	
C52	1554007	CAPACITOR, solid, tantalum, 68µf, 15V, ±10%	2.50	1
C53	1518022	CAPACITOR, fixed, cer, 0.01µf, 500V, GMV	.15	
CR1	48000 23	DIODE, silicon, HMN 9008A	1.78	6
CR2	48000 23	DIODE, silicon, HMN 9008A	1.78	
CR3	4802015	DIODE, silicon, 750ma, 100PIV, SC1	1.10	6

REFERENCE DESIGNATION INDEX

CIRCUIT REFERENCE	R.E.C. STOCK NUMBER	DESCRIPTION	SUGGESTED UNIT PRICE	SUG-SPARES
CR4	4802015	DIODE, silicon, 750ma, 100PIV, SC1	1.10	
CR5	4802015	DIODE, silicon, 750ma, 100PIV, SC1	1.10	
CR6	4802015	DIODE, silicon, 750ma, 100PIV, SC1	1.10	
CR7	4804008	DIODE, zener, 1N1606	7.50	1
CR8	4800023	DIODE, silicon, HMN 9008A	1.78	
CR9	4800023	DIODE, silicon, HMN 9008A	1.78	
CR10	4800020	DIODE, germanium, 1N774	.82	8
CR11	4802015	DIODE, silicon, 750ma, 100PIV, SC1	1.10	
CR12	4800020	DIODE, germanium, 1N774	.82	
CR13	4800023	DIODE, silicon, HMN 9008A	1.78	
CR14	4800023	DIODE, silicon, HMN 9008A	1.78	
CR15	4800020	DIODE, germanium, 1N774	.82	
CR16	4800020	DIODE, germanium, 1N774	.82	
CR17	4800020	DIODE, germanium, 1N774	.82	
CR18	4800020	DIODE, germanium, 1N774	$ .82	
CR19	4802015	DIODE, silicon, 750ma, 100PIV, SC1	1.10	
CR20	4800020	DIODE, germanium, 1N774	.82	
CR21	4800020	DIODE, germanium, 1N774	.82	
CR22	4804021	DIODE, zener, Z4XL6.2	3.00	1
DL1	2354004	DELAY LINE, fixed, 0.120μsec	8.50	1
DS1	3912001	LAMP, indicator, pilot (#47)	.15	1
DS2	3912003	LAMP, indicator, overload (#44)	.15	1
F1	5180012	FUSE, type 3AG, 0.5 amp, SLO BLO	.30	
J1	2128020	CONNECTOR, coax, UG-657/U, type BNC	1.88	1
J2	2128020	CONNECTOR, coax, UG-657/U, type BNC	1.88	
J3	2128020	CONNECTOR, coax, UG-657/U, type BNC	1.88	
L1	1816005	COIL, fixed, 0.24μH, ±15%	.60	1

CIRCUIT REFERENCE	R.E.C. STOCK NUMBER	DESCRIPTION	SUGGESTED UNIT PRICE	SUG-SPARES
P1	6025002	CORD, power, w/plug, 3 wire, and strain relief No 6030004	1.95	1
Q1	4830007	TRANSISTOR, germanium, 2N1195	7.75	3
Q2	4839001	TRANSISTOR, silicon, 2N706	4.74	5
Q3	4830007	TRANSISTOR, germanium, 2N1195	7.75	
Q4	4839001	TRANSISTOR, silicon, 2N706	4.74	
Q5*	4838012	TRANSISTOR, germanium, SM1475	4.75	9
Q6*	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q7*	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q8*	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q9*	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q10	4837003	TRANSISTOR, silicon, RCA 40250	2.20	1
Q11*	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q12*	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q13*	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q14	4838012	TRANSISTOR, germanium, SM1475	4.75	
Q15	4839001	TRANSISTOR, silicon, 2N706	4.74	
Q16	4839001	TRANSISTOR, silicon, 2N706	4.74	
Q17	4830007	TRANSISTOR, germanium, 2N1195	7.75	
Q18	4839005	TRANSISTOR, silicon, 2N2537	7.65	1
*	4838006	2N964 - can sub for SM1475		
R1	4758681	RESISTOR, fixed, comp, 680Ω, ½W, ±10%	.12	1
R2 ⊛		RESISTOR, fixed, comp, , ½W, ±10%	.12	
R3	4700014	RESISTOR, var, comp, 500Ω, 1W, ±20%	3.00	3
R4	4700065	RESISTOR, var, comp, 500Ω, 1W, ±20%	3.75	3
R5	4700008	RESISTOR, var, comp, 1K, 1W, ±30%	3.00	1
R6	4758222	RESISTOR, fixed, comp, 2.2K, ½W, ±10%	.12	2
R7	4758271	RESISTOR, fixed, comp, 270Ω ½W, ±10%	.12	2
R8	4758152	RESISTOR, fixed, comp, 1.5K, ½W, ±10%	.12	3
R9	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	9
R10	4758331	RESISTOR, fixed, comp, 330Ω, ½W, ±10%	.12	5
R11	4758471	RESISTOR, fixed, comp, 470Ω, ½W, ±10%	.12	5

⊛ Value assigned at time of calibration.

REFERENCE DESIGNATION INDEX

CIRCUIT REFERENCE	R.E.C. STOCK NUMBER	DESCRIPTION	SUGGESTED UNIT PRICE	SUG-SPARES
R12	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R13	4758471	RESISTOR, fixed, comp, 470Ω, ½W, ±10%	.12	
R14	4758101	RESISTOR, fixed, comp, 100Ω, ½W, ±10%	.12	3
R15	4758181	RESISTOR, fixed, comp, 180Ω, ½W, ±10%	.12	1
R16	4700065	RESISTOR, var, comp, 500Ω, 1W, ±20%	3.75	
R17	4700014	RESISTOR, var, comp, 500Ω, 1W, ±20%	3.00	
R18	4760470	RESISTOR, fixed, comp, 47Ω, 2W, ±10%	.24	1
R19	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R20	4758561	RESISTOR, fixed, comp, 560Ω, ½W, ±10%	.12	2
R21	4760221	RESISTOR, fixed, comp, 220Ω, 2W, ±10%	.24	1
R22	4758331	RESISTOR, fixed, comp, 330Ω, ½W, ±10%	.12	
R23	4758103	RESISTOR, fixed, comp, 10K, ½W, ±10%	.12	2
R24	4760390	RESISTOR, fixed, comp, 39Ω, 2W, ±10%	.24	1
R25	4700018	RESISTOR, var, comp, 2.5K, 2W, ±20%	4.04	1
R26	4758331	RESISTOR, fixed, comp, 330Ω, ½W, ±10%	.12	
R27	4700009	RESISTOR, VARIABLE, 5K, 1W, ± 30%		
R28	4758561	RESISTOR, fixed, comp, 560Ω, ½W, ±10%	.12	
R29	4758331	RESISTOR, fixed, comp, 330Ω, ½W, ±10%	.12	
R30	4758101	RESISTOR, fixed, comp, 100Ω, ½W, ±10%	.12	
R31	4758101	RESISTOR, fixed, comp, 100Ω, ½W, ±10%	.12	
R32	4700065	RESISTOR, var, comp, 500Ω, 1W, ±20%	3.75	
R33	4700014	RESISTOR, var, comp, 500Ω, 1W, ±20%	3.00	
R34	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R35	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R36	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R37	4758122	RESISTOR, fixed, comp, 1.2K, ½W, ±10%	.12	2
R38	4758103	RESISTOR, fixed, comp, 10K, ½W, ±10%	.12	
R39	4700009	RESISTOR, var, comp, 5K, 1W, ±30%	3.00	
R40	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R41	4758471	RESISTOR, fixed, comp, 470Ω, ½W, ±10%	.12	
R42	4758331	RESISTOR, fixed, comp, 330Ω, ½W, ±10%	.12	
R43	4758152	RESISTOR, fixed, comp, 1.5K, ½W, ±10%	.12	
R44	4758122	RESISTOR, fixed, comp, 1.2K, ½W, ±10%	.12	
R45	4759390	RESISTOR, fixed, comp, 39Ω, 1W, ±10%	.18	2
R46	4758100	RESISTOR, fixed, comp, 10Ω, ½W, ±10%	.12	7
R47	4759390	RESISTOR, fixed, comp, 39Ω, 1W, ±10%	.18	

REFERENCE DESIGNATION INDEX

CIRCUIT REFERENCE	R.E.C. STOCK NUMBER	DESCRIPTION	SUGGESTED UNIT PRICE	SUG-SPARES
R48	4758151	RESISTOR, fixed, comp, 150Ω, ½W, ±10%	.12	1
R49	4758222	RESISTOR, fixed, comp, 2.2K, ½W, ±10%	.12	
R50	4758330	RESISTOR, fixed, comp, 33Ω, ½W, ±10%	.12	1
R51	4758471	RESISTOR, fixed, comp, 470Ω, ½W, ±10%	.12	
R52	4758471	RESISTOR, fixed, comp, 470Ω, ½W, ±10%	.12	
R53	4760180	RESISTOR, fixed, comp, 18Ω, 2W, ±10%	.24	1
R54	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R55	4758102	RESISTOR, fixed, comp, 1K, ½W, ±10%	.12	
R56				
R57	4758220	RESISTOR, fixed, comp, 22Ω, ½W, ±10%	.12	3
R58	4758220	RESISTOR, fixed, comp, 22Ω, ½W, ±10%	.12	
R59	4758220	RESISTOR, fixed, comp, 22Ω, ½W, ±10%	.12	
R60	4758470	RESISTOR, fixed, comp, 47Ω, ½W, ±10%	.12	3
R61	4758470	RESISTOR, fixed, comp, 47Ω, ½W, ±10%	.12	
R62	4758470	RESISTOR, fixed, comp, 47Ω, ½W, ±10%	.12	
R63	4758100	RESISTOR, fixed, comp, 10Ω, ½W, ±10%	.12	
R64	4758100	RESISTOR, fixed, comp, 10Ω, ½W, ±10%	.12	
R65	4758100	RESISTOR, fixed, comp, 10Ω, ½W, ±10%	.12	
R66	4758100	RESISTOR, fixed, comp, 10Ω, ½W, ±10%	.12	
R67	4758100	RESISTOR, fixed, comp, 10Ω, ½W, ±10%	.12	
R68	4758100	RESISTOR, fixed, comp, 10Ω, ½W, ±10%	.12	
R69	4758271	RESISTOR, fixed, comp, 270Ω, ½W, ±10%	.12	
R70	4758152	RESISTOR, fixed, comp, 1.5K, ½W, ±10%	.12	
R71	4758331	RESISTOR, fixed, comp, 330Ω, ½W, ±10%	.12	
S1	5110049	SWITCH, rotary, rep rate range	7.26	1
S2	5110046	SWITCH, rotary, function	1.80	1
S3	5110047	SWITCH, rotary, delay or width range	6.33	1
S4	5110047	SWITCH, rotary, delay or width range	6.33	
S5	5120005	SWITCH, toggle, DPDT, 20DB attenuator	2.80	1
S6	5110048	SWITCH, rotary, polarity	1.85	1
S7	5140001	SWITCH, push-button, SPDT, single shot	36.75	1
S8	5120001	SWITCH, toggle, SPST, single-double pulse	1.80	1
T1	5640005	TRANSFORMER, power	12.50	1
T2	5650004	TRANSFORMER, pulse	7.50	1

REFERENCE DESIGNATION INDEX

CIRCUIT REFERENCE	R.E.C. STOCK NUMBER	DESCRIPTION	SUGGESTED UNIT PRICE	SUG. SPARES
	2120001	ADAPTER, power cord, 3 wire to 2 wire	.52	1
	8501008	ASSY, switch, delay, w/comps assembled	25.56	
	8501009	ASSY, switch, polarity, w/comps assembled	4.25	
	8501010	ASSY, switch, rep rate, w/comps assembled	30.11	
	8501008	ASSY, switch, width, w/comps assembled	25.56	
	1420001	BRACKET, cord holding	3.00	
	1410001	COVERS, B15, top and bottom	12.85	
	1410002	COVERS, B15R, top and bottom	14.75	
	2420001	HANDLE, instrument	2.75	
	2118003	HOLDER, fuse	.62	1
	8700015	HOLDER, lamp, clear	.64	1
	8700019	HOLDER, lamp, green	.64	1
	2422018	KNOB, instrument, amplitude	.60	1
	2422015	KNOB, instrument, coarse rep rate, delay or width	.75	1
	2422016	KNOB, instrument, fine rep rate, delay or width	.47	1
	2422017	KNOB, instrument, function or polarity	.48	1
	9215003	MANUAL, instruction	$ 5.00	1
	1445004	PANEL, front, B15 w/silk screen	9.75	
	1445005	PANEL, front, B15R w/silk screen	10.50	
	3130008	STOOL, transistor insulator	.19	10

BLOCK & TIMING DIAGRAM

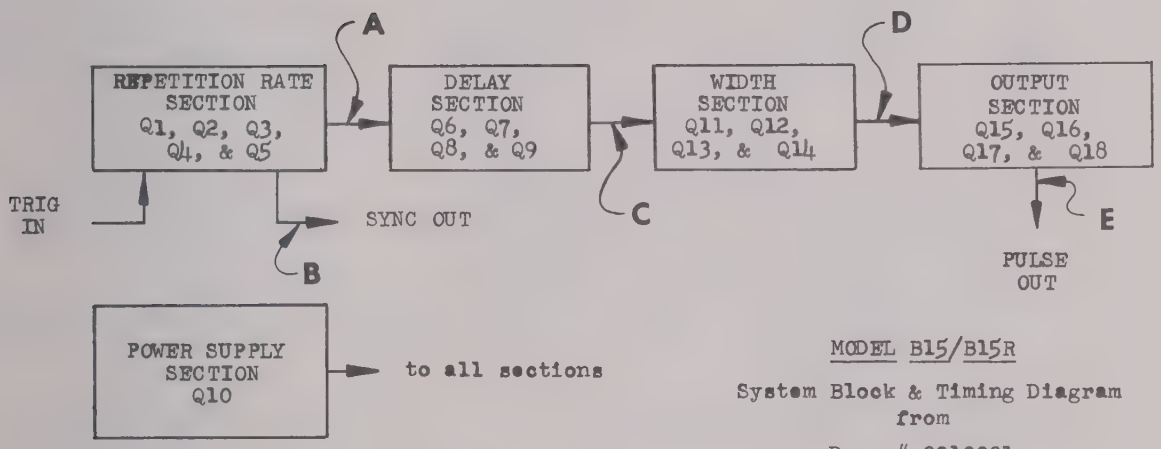

MODEL B15/B15R

System Block & Timing Diagram from

Dwg. # 0010001

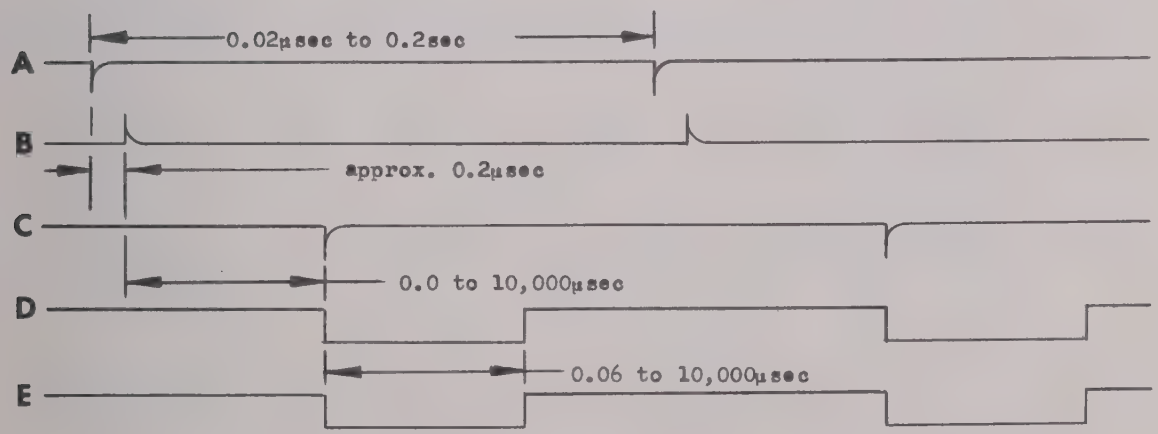

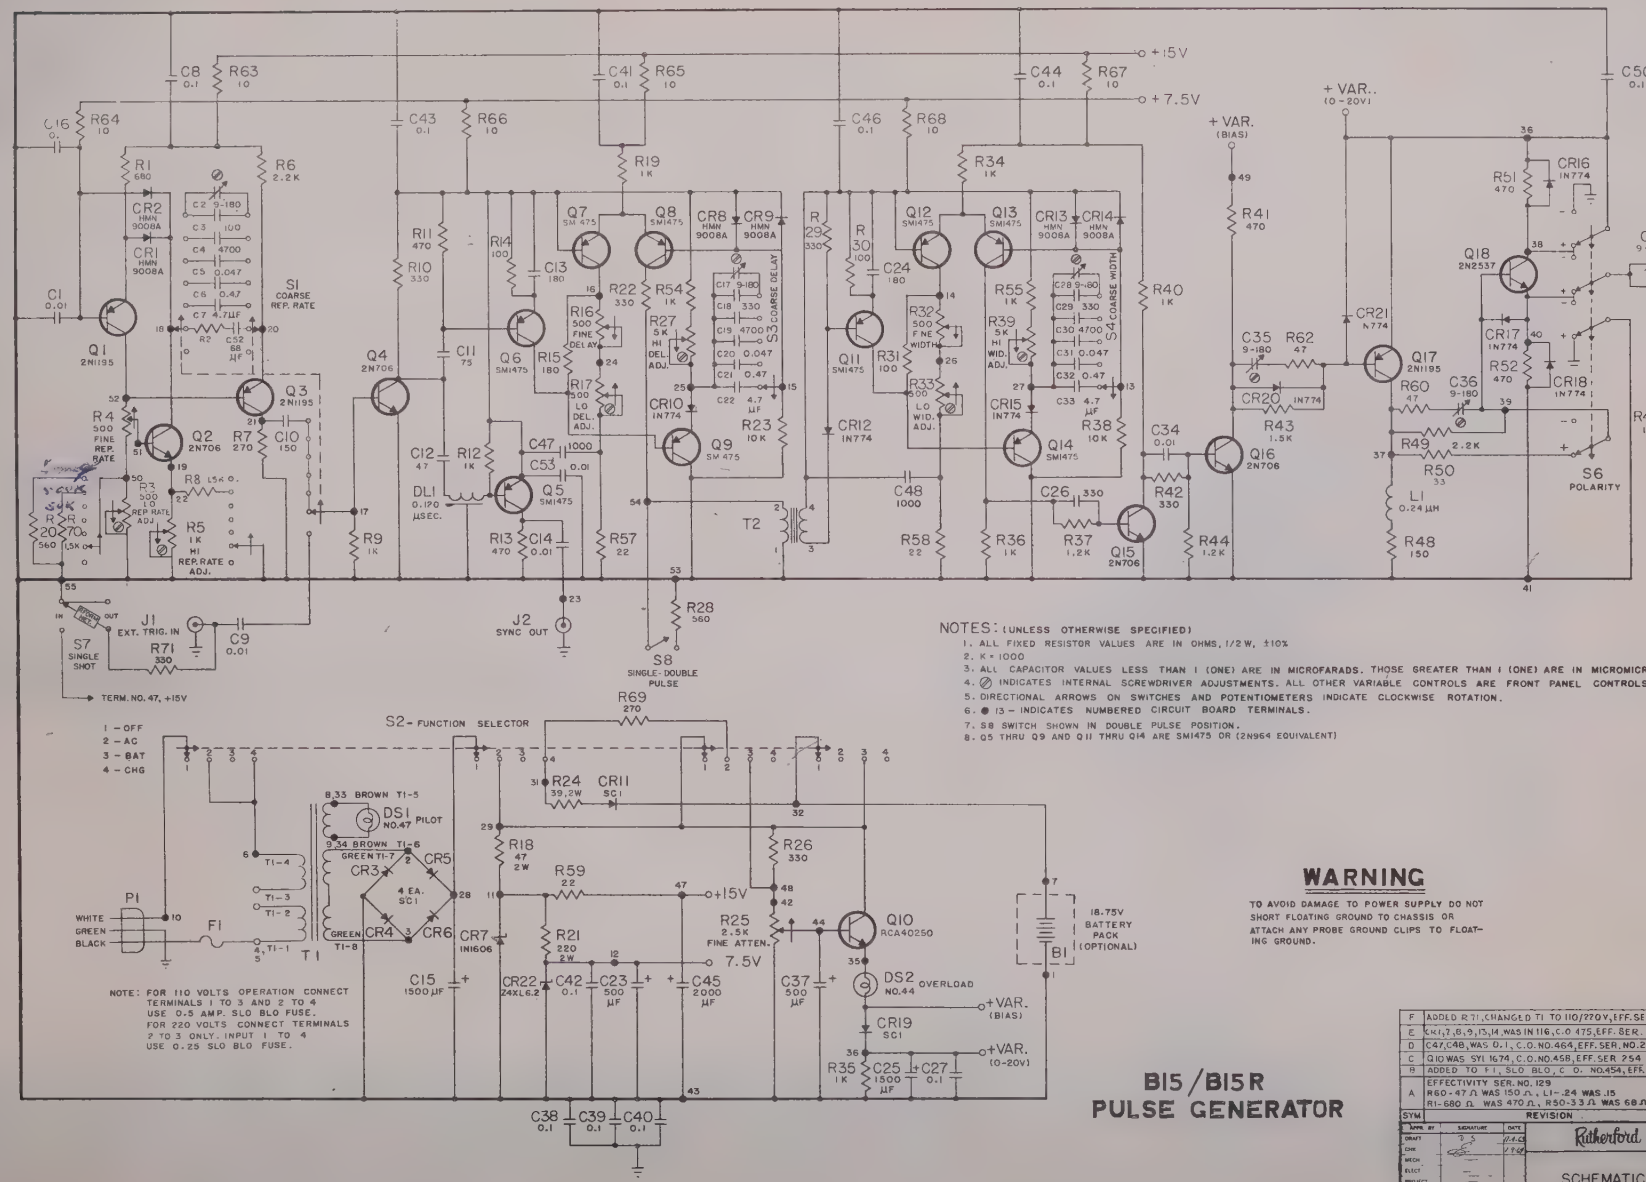

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL FIXED RESISTOR VALUES ARE IN OHMS, 1/2 W, ±10%
2. K = 1000
3. ALL CAPACITOR VALUES LESS THAN 1 (ONE) ARE IN MICROFARADS. THOSE GREATER THAN 1 (ONE) ARE IN MICROMICROFARADS.
4. ⊘ INDICATES INTERNAL SCREWDRIVER ADJUSTMENTS. ALL OTHER VARIABLE CONTROLS ARE FRONT PANEL CONTROLS.
5. DIRECTIONAL ARROWS ON SWITCHES AND POTENTIOMETERS INDICATE CLOCKWISE ROTATION.
6. ● 13 - INDICATES NUMBERED CIRCUIT BOARD TERMINALS.
7. S8 SWITCH SHOWN IN DOUBLE PULSE POSITION.
8. Q5 THRU Q9 AND Q11 THRU Q14 ARE SM1475 OR (2N964 EQUIVALENT)

NOTE: FOR 110 VOLTS OPERATION CONNECT TERMINALS 1 TO 3 AND 2 TO 4 USE 0.5 AMP. SLO BLO FUSE. FOR 220 VOLTS CONNECT TERMINALS 2 TO 3 ONLY. INPUT 1 TO 4 USE 0.25 SLO BLO FUSE.

WARNING

TO AVOID DAMAGE TO POWER SUPPLY DO NOT SHORT FLOATING GROUND TO CHASSIS OR ATTACH ANY PROBE GROUND CLIPS TO FLOATING GROUND.

B15/B15R PULSE GENERATOR

SYM	REVISION	DATE	APP'D
F	ADDED R71, CHANGED T1 TO 110/220V, EFF. SER 313	8-25-65	
E	C41, 2, 6, 9, 13, 14 WAS IN 116, C.O 475, EFF. SER. NO. 308	7-13-65	
D	C47, C48, WAS 0.1, C.O. NO. 464, EFF. SER. NO. 259	3-30-65	
C	Q10 WAS SYL 1674, C.O. NO. 458, EFF. SER. 254	9-28-64	
B	ADDED TO T1, SLO BLO, C.O. NO. 454, EFF. SER. 229	7-29-64	
A	EFFECTIVITY SER. NO. 129 R60-47Ω WAS 150Ω, L1-.24 WAS .15 R1-680Ω WAS 470Ω, R50-33Ω WAS 68Ω.		

	NAME	SIGNATURE	DATE
DRAWN BY			11-4-65
CHK			11-9-65
MECH			
ELECT			
PROJECT			
APPROVED BY			

Rutherford ELECTRONICS CO. GARDEN GROVE, CALIF.

SCHEMATIC DIAGRAM

PART NO. USED ON	B15
APPLICATION	MODEL

CODE IDENT NO	SIZE	DRAWING NUMBER
89248		0010004

SCALE — REV — SHEET 1 OF 1

B15 CHANGE INFORMATION

AGE 14

PART NO.	DESCRIPTION	CHANGE TO PART NO.	PRICE	EFFECTIVE SERIAL NO.
1410001	Cover	1410024	$8.00	347 up
1410002	Cover	D E L E T E		347 up
2420001	Handle	2420019	$2.75	347 up
2422018	Knob	CMC7250024	$1.70	347 up
2422015	Knob	CMC7250022	$2.05	347 up
2422016	Knob	CMC6250005	$1.43	347 up
2422017	Knob	CMC7250023	$2.05	347 up
1445004	Panel	1445036	$12.50	347 up
1445005	Panel	D E L E T E		347 up
ADD				
8700052	Assy., end cover, Left		$12.50	347 up
8700053	Assy., end cover, Right		$12.50	347 up
1455041	Rack Mount Tabs		$25.00/pr	347 up
1455042	"			

NOTE: To Use Rack Mounting Tabs (For use on instruments Serial No. 347 up)

1. Remove 2 each side panels and discard
2. Remove 4 each 10-24 flat head screws holding handles
3. Place Rack Mounting Tabs in place and attach with same 10-24 screws.

CHANGE SHEET FOR MODELS

B14 and B15

Q16 is changed to type 2N3509. R41 is changed to 220 ohms ±10%.

The above is effective on B14 instruments Serial No. P389, P417, P423, P426 and up. See drawing 0010002.

The above is effective on B15 instruments Serial No. P403, P418, P424 and up. See drawing 0010004.

JS 1-16-67

ST-0615/2

Rutherford DIVISION CMC

12970 BRADLEY AVENUE • SAN FERNANDO, CALIFORNIA 91342 • PHONE (213) ~~772-6321~~ · TWX 213-647-5170

213-367-2161

Jerry Muchmore

Service Dept.

500-11/65 PN 9215003

PRINTED IN U.S.A.